



# Quick Start

## 1 For Internet Connections via Ethernet:

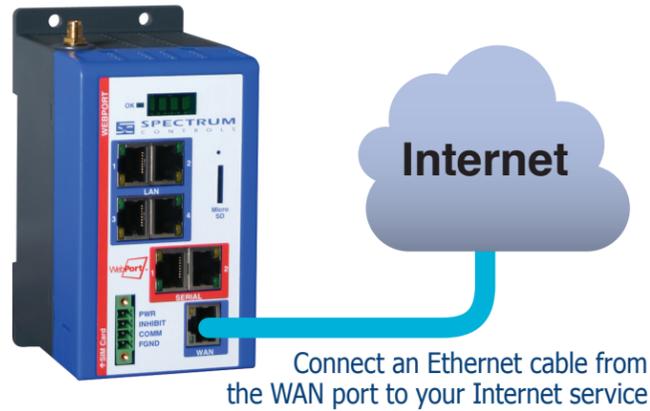

## OR For Internet Connections via Cellular:

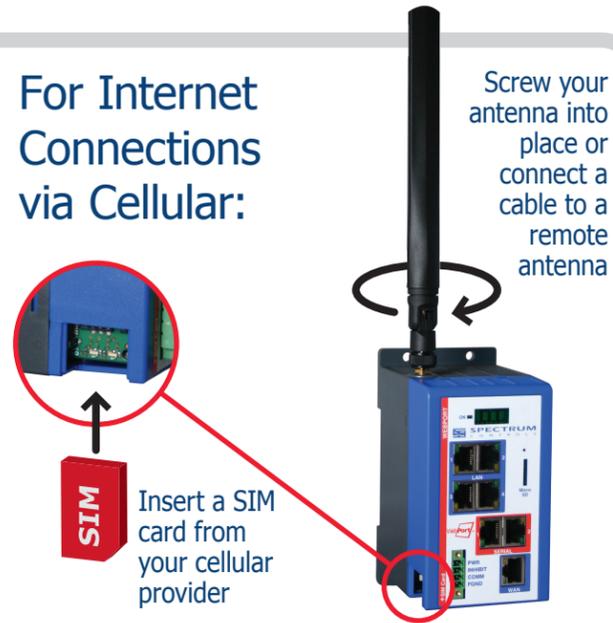


## 2 Connect PC to LAN Port

Connect an Ethernet cable from the LAN port to your PC. Do not connect to the WAN port.



## 3 Connect Power Supply

Wire size: 22-14 gauge (2 mm) stranded  
Tightening torque, min 0.22 Nm (2 in/lbs.)

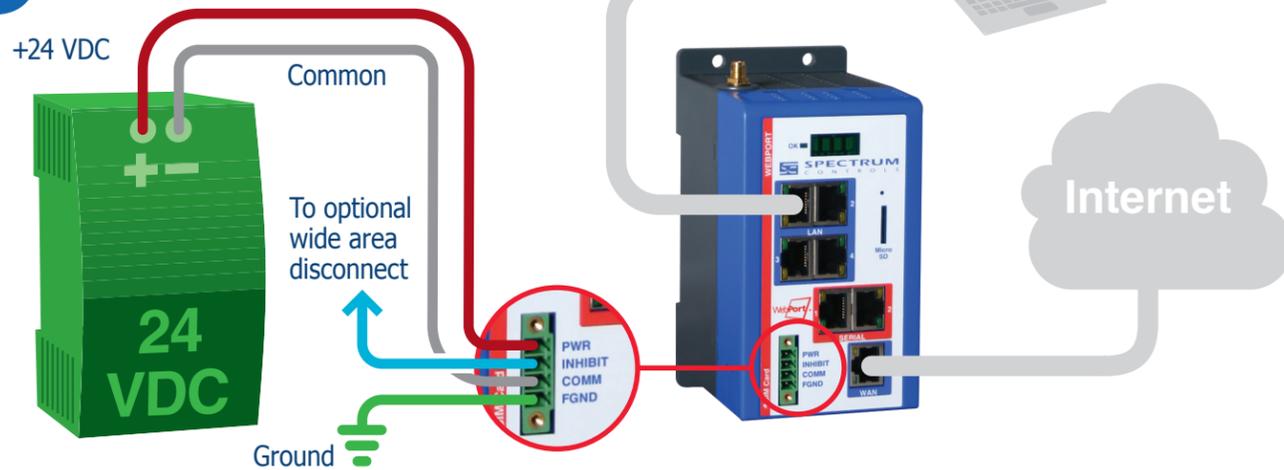

## 4 Log In to WebPort

Type your LAN IP address into your browser. Then, enter the default username and password.

**Username: admin**  
**Password: spectrum**

Create a new password for your account.



- Required from User:
- Internet connection (for WAN connectivity)
  - SIM card from cellular provider and cell antenna (for cellular connectivity)
  - Device rating: 24VDC 0.38A (24 VDC power supply)
  - All cables and wiring


**Models Covered:** WP-R-3G-SW-0, WP-ET-SW-0\*, WP-R-3G-SW-I, WP-R-4G-SW-AT  
**What's Next?** See the other side to register your WebPort to the cloud.  
**Questions?** Access our built-in online help.  
**Ambient Temperature Range:** Ta 0-60C

# Registering WebPort Connects

## 5




Open the Configuration dashboard at the top of the screen.

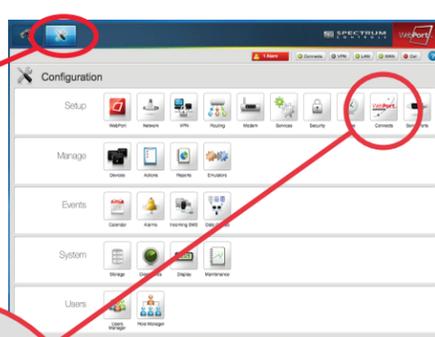

Then, click on the WebPort Connects button. Both the PC and WebPort need Internet access for this step.

## 6

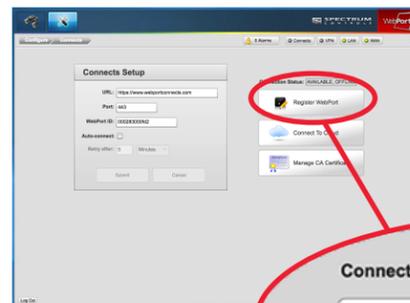

Connection Status: AVAILABLE, OFFLINE


Register WebPort

Once you have clicked the WebPort Connects button, click on "Register WebPort." Register your account and Webport.

## 7

[www.webportconnects.com](http://www.webportconnects.com) opens in your browser.

Enter your WebPort Connects credentials.

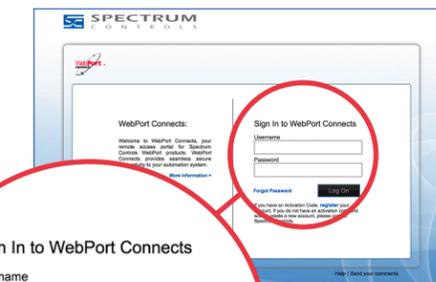

Sign In to WebPort Connects

Username


Password

Forgot Password

Log On

NOTE: If you don't have a Connects account, create a WebPort Connects account at [www.webportconnects.com](http://www.webportconnects.com).

## 8

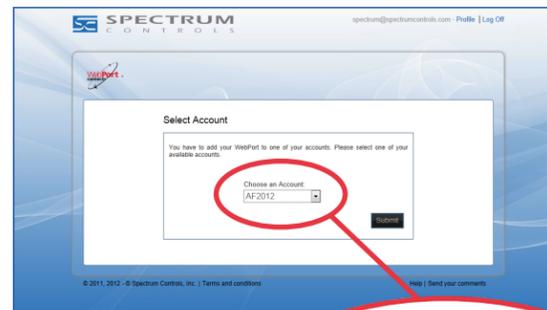

Next, choose your account from the dropdown menu.


After making your selection, click Submit.

Choose an Account:

AF2012

## 9

Enter ID, WebPort name, and other information in the WebPort dialog.

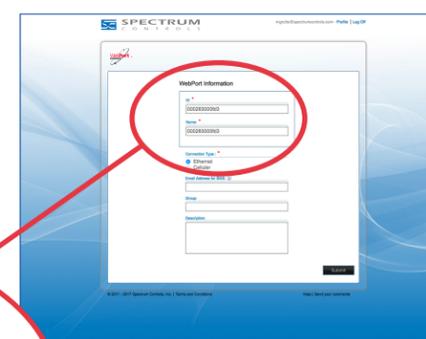

WebPort Information

ID: \*

000283000fd3

Name: \*

000283000fd3

Connection Type: \*

Ethernet


Cellular

Email Address for SMS: ⓘ

After entering your information, click Submit.

## 10

You are now a registered member of the WebPort family. To find out how to connect to the cloud, set up an alarm, configure a tag, and much more, please visit the context-sensitive help located on your WebPort. For more help, check out our YouTube Channel at: [www.youtube.com/WebportAcademy](http://www.youtube.com/WebportAcademy)

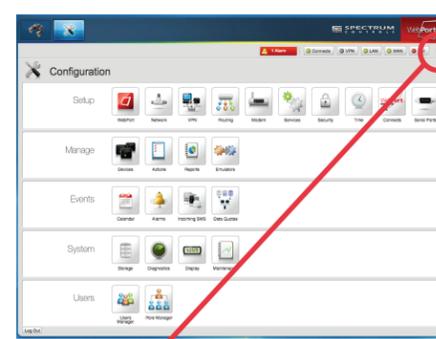

You can access context-sensitive help at anytime by clicking the online help button on your WebPort.

\*ATEX and CE only applies to WP-ET-SW-0  
ATEX  
Ex nA IIC T5 Gc  
II 3G  
CE  
DEMKO 11 ATEX 1103445X  
EN 60079-0:2012+A11:2013 and EN 60079-15:2010

Special condition for safe use

1. Provision shall be made to prevent the rated voltage being exceeded by transient disturbances of more than 140% of the peak rated voltage.
2. The system shall be mounted in an ATEX certified enclosure with a minimum ingress protection rating of at least IP54, in accordance with EN 60079-15 and used in an environment of not more than pollution degree 2. The enclosure shall be accessible only with the use of a tool.

SUITABLE FOR USE IN CLASS I, DIVISION 2, GROUPS A, B, C, AND D HAZARDOUS LOCATIONS, OR NONHAZARDOUS LOCATIONS ONLY.

WARNING - EXPLOSION HAZARD - DO NOT DISCONNECT EQUIPMENT WHILE THE CIRCUIT IS LIVE OR UNLESS THE AREA IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS.  
AVERTISSEMENT - RISQUE D'EXPLOSION - Ne déconnectez l'équipement tandis que le circuit est sous tension ou si la zone est connue pour être libre de Concentrations inflammables.

This device shall be installed in an enclosure which can only be opened with the use of a tool.  
Cet appareil doit être installé dans un boîtier qui ne peut être ouvert qu'avec un outil.